


# LamaPLC: CJMCU-219/INA-219 breakout board/IC with I<sup>2</sup>C communication

The **CJMCU-219** is a *breakout board* featuring the **INA219 IC**, a zero-drift, bidirectional current and power monitor with an **I<sup>2</sup>C** interface.

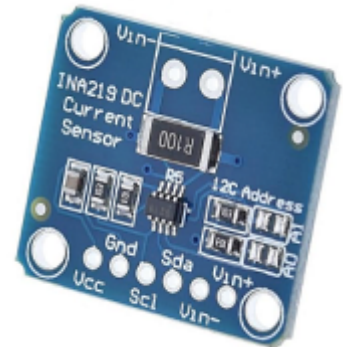

## Core Technical Specifications

- **Voltage Measurement:** Can detect bus voltages from **0V to +26V DC**.
- **Current Range:** Measures **up to ±3.2A** bidirectionally using its built-in 0.1 ohm shunt resistor.
- **Supply Voltage:** Operates on **+3.0V to +5.5V**.
- **Precision:** Features a 12-bit ADC with a maximum error accuracy of 1% over -40°C to +85°C.
- **Interface:** Uses I<sup>2</sup>C communication (standard 100kHz or high-speed 400kHz/3.4MHz) with a default address of **0x40**.

## Key Features

- **High-Side Sensing:** Unlike many sensors, it can measure current on the high side (between the power source and the load), thereby avoiding ground-reference issues.
- **Multi-Function Reporting:** It calculates and reports bus voltage, shunt voltage drop, current, and total power (W) directly.
- **Programmability:** Supports software-programmable calibration, filtering (averaging up to 128 samples), and conversion times.
- **Daisy-Chaining:** Supports up to 16 programmable I<sup>2</sup>C addresses, allowing multiple modules to run on the same bus.

## Safety & Limitations

- **Voltage Limit:** The chip may be damaged if bus voltage exceeds its absolute hardware limit of 26V.
- **Inductive Loads:** Users should be cautious with large motors, as “flyback” voltage spikes can exceed the 26V threshold and destroy the sensor.




If you'd like to support the development of the site with the price of a coffee — or a few — [please do so here](#).

Here's a handy tip: you can quickly save this page as a PDF by clicking “*export to PDF*” in the menu on the right side of the screen.

# CJMCU-219 Pinout

## Logic and Power Pins

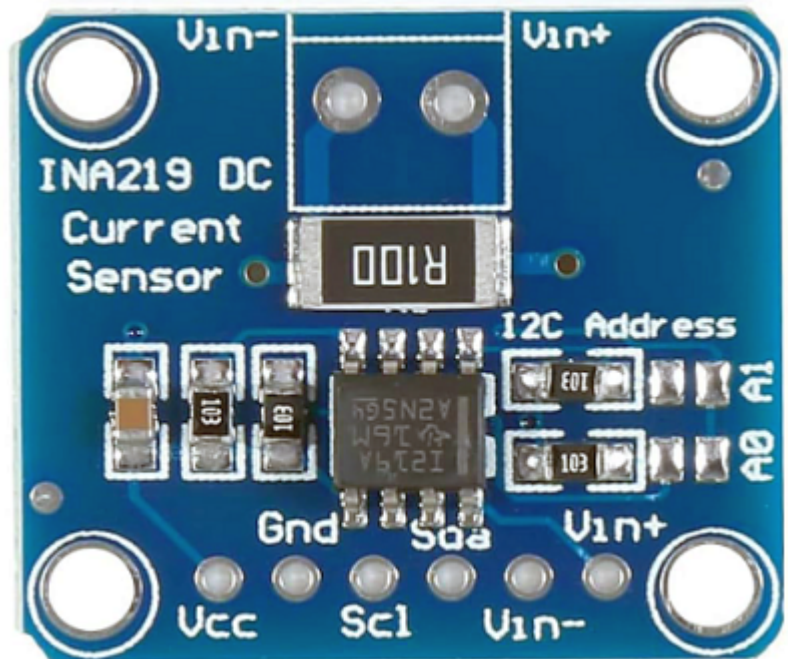

These pins connect to your microcontroller (e.g., Arduino or Raspberry Pi) to power the sensor and transmit data.

- **VCC:** Supply voltage for the module (**3.0V to 5.5V**).
- **GND:** Common ground for both power and logic.
- **SCL:** I<sup>2</sup>C serial clock line.
- **SDA:** I<sup>2</sup>C serial data line.

## Measurement (Load) Pins

These pins are placed in series with the positive side (high-side) of the circuit you want to monitor.

- **Vin+:** Connect to the positive terminal of your power source (e.g., battery).
- **Vin-:** Connect to the positive terminal of your load (the device being powered).

## I<sup>2</sup>C addressing Pins (A0 & A1)

Some versions of the CJMCU-219 include solder pads labeled **A0** and **A1**. By default, these are connected to GND, setting the I<sup>2</sup>C address to **0x40**.

Bridging these pads to VCC allows you to set the address to any of 16 values (**0x4F**), enabling multiple sensors on the same I<sup>2</sup>C bus.

**Caution:** The maximum bus voltage the Vin pins can safely handle is 26V DC.

## Arduino wiring

- VCC → Arduino 5V (o 3.3V).
- GND → Arduino GND.

- SCL → Arduino SCL (A5 on Uno/Nano).
- SDA → Arduino SDA (A4 on Uno/Nano).
- Vin+ → Positive side of your power supply.
- Vin- → Positive side of your load (the device being powered).

## Arduino code

To begin using the CJMCU-219 with Arduino, the easiest approach is to use the **Adafruit INA219** library.

This example code sets up the sensor and outputs voltage, current, and power readings to the Serial Monitor at **115200 baud**.

A simple example with the Adafruit\_INA219 library involves initializing the sensor and repeatedly reading and displaying bus voltage, shunt voltage, load voltage, current, and power. The complete code is available in the provided source document.

```
#include <Wire.h>
#include <Adafruit_INA219.h>

Adafruit_INA219 ina219;

void setup(void) {
  Serial.begin(115200);
  while (!Serial) { delay(1); } // Wait for serial port to connect

  // Initialize the INA219 (default address 0x40)
  if (!ina219.begin()) {
    Serial.println("Failed to find INA219 chip");
    while (1) { delay(10); }
  }

  // Optional: Set calibration for higher precision
  // Default is 32V, 2A. Alternatives:
  // ina219.setCalibration_32V_1A();
  // ina219.setCalibration_16V_400mA();

  Serial.println("Measuring voltage and current with INA219...");
}

void loop(void) {
  float shuntvoltage = 0;
  float busvoltage = 0;
  float current_mA = 0;
  float loadvoltage = 0;
  float power_mW = 0;

  // Read data from sensor
  shuntvoltage = ina219.getShuntVoltage_mV();
  busvoltage = ina219.getBusVoltage_V();
```

```

current_mA = ina219.getCurrent_mA();
power_mW = ina219.getPower_mW();
loadvoltage = busvoltage + (shuntvoltage / 1000);

// Print results
Serial.print("Bus Voltage: "); Serial.print(busvoltage);
Serial.println(" V");
Serial.print("Shunt Voltage: "); Serial.print(shuntvoltage);
Serial.println(" mV");
Serial.print("Load Voltage: "); Serial.print(loadvoltage);
Serial.println(" V");
Serial.print("Current: "); Serial.print(current_mA);
Serial.println(" mA");
Serial.print("Power: "); Serial.print(power_mW); Serial.println("
mW");
Serial.println("");

delay(2000);
}

```

### Key Functions Explained

- *begin()*: Starts I2C communication. It uses address 0x40 by default.
- *getBusVoltage\_V()*: Returns the voltage between GND and the load (V-).
- *getShuntVoltage\_mV()*: Returns the voltage drop across the 0.1 ohm resistor.
- *getCurrent\_mA()*: Returns the current flowing through the sensor.
- *getPower\_mW()*: Calculates power based on the current and bus voltage.

### Calibration for Accuracy

The library includes built-in calibration modes to improve precision for specific ranges:

- **Default:** 32V, 2A (Used if no other function is called).
- **setCalibration\_32V\_1A():** Increases precision for current measurements up to 1A.
- **setCalibration\_16V\_400mA():** Highest precision for low-voltage, low-current projects.

## I<sup>2</sup>C topics on lamaPLC

Page	Date	Tags
• <a href="#">lamaPLC Communication: 1-Wire</a>	2026/04/23 21:51	<a href="#">1-wire</a> , <a href="#">communication</a> , <a href="#">bus</a> , <a href="#">microlan</a> , <a href="#">i2c</a> , <a href="#">uart</a> , <a href="#">usart</a> , <a href="#">ds18b20</a>
• <a href="#">lamaPLC Communication: I<sup>2</sup>C</a>	2025/09/23 21:25	<a href="#">i2c</a> , <a href="#">i c</a> , <a href="#">smbus</a> , <a href="#">philips</a> , <a href="#">bus</a> , <a href="#">communication</a> , <a href="#">arduino</a>
• <a href="#">lamaPLC project: Sension SCD CO<sup>2</sup> measurement module</a>	2026/04/15 19:34	<a href="#">scd30</a> , <a href="#">scd40</a> , <a href="#">scd41</a> , <a href="#">iaq</a> , <a href="#">ndir</a> , <a href="#">sensor</a> , <a href="#">i2c</a> , <a href="#">arduino code</a>
• <a href="#">LamaPLC: AHT10 Modul</a>	2026/03/22 03:14	<a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">sensor</a> , <a href="#">aht</a> , <a href="#">aht 10</a> , <a href="#">modul</a>
• <a href="#">LamaPLC: AHT20 / BMP280 Modul</a>	2026/04/23 21:52	<a href="#">bmp280</a> , <a href="#">aht20</a> , <a href="#">adafruit</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">pressure</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">i2c</a>

- LamaPLC: APDS - Avago ALS and proximity detection sensors with I<sup>2</sup>C communication

2026/04/23 21:52

avago, apds-9900, apds-9930, apds-9960, als, proximity, detection, gesture recognition, gesture, i2c, communication, sensor, arduino, code
- lamaPLC: Arduino Modul: BME680

2026/05/12 18:40

code, c, 2026, arduino, bme680, sensor, i2c, comunication
- lamaPLC: AS5600 Magnetic Induction Angle Measurement Sensor Module

2026/05/13 00:06

communication, i2c, as5600, as-5600, magnetic, induction, angle, sensor
- lamaPLC: Bi-Directional Logic Level Converter 3.3V ↔ 5V

2026/04/12 00:34

bi-directional, logic level converter, i2c, uart, spi
- LamaPLC: BMP/BME Bosch Temperature/Humidity/Pressure sensors with I<sup>2</sup>C communication

2026/04/23 21:52

bme280, bme680, bme688, bmp180, bmp280, hw-611, hw611, bosch, temperature, humidity, pressure, sensor, arduino, i2c, communication, ai, cjmcu, volatile organic compounds, vocs, volatile sulfur compounds, vscs, iaq
- LamaPLC: CJMCU-219/INA-219 breakout board/IC with I<sup>2</sup>C communication

2026/04/23 21:52

cjmcu-219, ina-219, ina219, breakout board, i2c, communication, sensor, voltage, current, arduino, code, cjmcu
- LamaPLC: CJMCU-3216 / AP-3216 integrated digital ambient light and proximity sensor module/IC with I<sup>2</sup>C communication

2026/04/23 21:52

cjmcu-3216, cjmcu, ap-3216, ap3216, ambient light, proximity, sensor, arduino, code, i2c, communication
- lamaPLC: CJMCU-811 CCS811 Gas Sensor (VOCs TVOC CO<sub>2</sub>)

2026/04/23 21:52

cjmcu-811, ccs811, gas, sensor, vocs, tvoc, eco2, co2, arduino, air quality metal oxide, mox, i2c, micropython, rp2040-eth
- LamaPLC: D6T Omron Non-Contact Thermal Sensors with I<sup>2</sup>C communication

2026/04/23 21:52

d6t, d6t-32l, d6t-44l, d6t-8l, d6t-1a, omron, non-contact, thermal, sensor, i2c, arduino, code
- LamaPLC: DPS Infineon Temperature/Pressure sensors with I<sup>2</sup>C communication

2026/04/23 21:52

dps310, infineon, temperature, pressure, sensor, arduino, i2c, communication, code
- lamaPLC: Energy, power, current, and voltage

2025/05/31 23:32

i2c, i c, communication, arduino, energy, power, current, sensor, ina226
- LamaPLC: ENS ScioSense Multi-gas sensors with I<sup>2</sup>C communication

2026/04/23 21:52

ens160, sciosense, gas-quality, i2c, communication, sensor, arduino, code, eco<sub>2</sub>, tvoc, aqi, indoor air quality, iaq, co<sub>2</sub>, voc
- lamaPLC: ESP32 / ESP8266

2025/11/22 00:07

esp8266, esp32, esp32-c2, esp32-c3, esp32-c5, esp32-c6, esp32-c61, esp32-h2, esp32-s2, esp32-s3, esp32-p4, espressif systems, communication, ethernet, ip, wi-fi, thread, zigbee, matter, homekit, bluetooth, mqtt, adc, spi, uart, i2c, i2s, rmt, pwm, usb, usb otg, twai

• <a href="#">LamaPLC: Gas sensors</a>	2023/07/01 17:29	gas, sensor, i2c, onewire, communication, mq-3, mq-4, mq-5, mq-6, mq-7, mq-8, mq-9, mq-135, gm-102b, gm-302b, gm-502b, gm-702b, alcohol, ch4, natural gas, smoke, lng, co, co2, lpg, h2, iso-butane, nox, nh3, benzene, town gas, formaldehyde, propane, humidity, temperature, voc, grv gas sens v2
• <a href="#">lamaPLC: GY-511 6DOF sensor module</a>	2026/04/23 21:52	stmicroelectronics, lsm303dlhc, i2c, lsm303, sensor, gy-511, 6dof, pololu, module, arduino
• <a href="#">LamaPLC: GY-9250 MPU-9250/6500 9-axis Attitude Sensor Board</a>	2026/04/23 21:52	ak8963, gy-9250, mpu-9250, 9-axis, motion detection, magnetometer, communication, i c, i2c, spi
• <a href="#">LamaPLC: HDC Texas Instruments Temperature/humidity sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	sht21, htu21, si7021, gy-21, gy-213v, hdc1080, gy-213v-hdc1080, cjmcu, cjmcu-1080, texas instruments, temperature, humidity, sensor, i2c, communication, arduino, code
• <a href="#">lamaPLC: HT16K33 display controller</a>	2026/04/23 21:51	i2c, 7-segment display, display, ht16k33, arduino
• <a href="#">LamaPLC: HTU TE Connectivity temperature/humidity sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	htu, htu31d, htu21d, htu20d, sht20, htu20, sht21, htu21, si7021, gy-21, gy-213v, hdc1080, si702, gy-20, sht31, htu31, si7031, gy-31, te connectivity, temperature, humidity, i2c, communication, sensor, arduino, code
• <a href="#">lamaPLC: INA modules with Arduino libraries</a>	2026/04/23 21:52	i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina219, gy-219, ina226, gy-216, ina228, gy-228, ina237, ina238, ina260, ina3221, ina
• <a href="#">lamaPLC: INA226 - current/voltage/power monitor with I<sup>2</sup>C communication</a>	2026/04/23 21:52	i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina226, ina219, ina
• <a href="#">lamaPLC: LCD 1602/2004 with I<sup>2</sup>C communication</a>	2026/02/14 18:27	communication, i2c, display, lcd, 1602, 2004, hd44780, pcf8574, pcf8574t, pcf8574at, arduino
• <a href="#">LamaPLC: MAX30100/MAX30102 Heart Rate Click Sensor Module</a>	2026/04/23 21:52	max30102, max30100, heart rate click, sensor, communication, i2c, arduino, code
• <a href="#">lamaPLC: MCP23017 / MCP23S17 16-Bit I/O Expander with Serial Interface I<sup>2</sup>C / SPI</a>	2026/04/23 21:52	communication, i2c, mcp23017, mcp23s17, spi, i o expander, serial, cjmcu-2317, cjmcu
• <a href="#">lamaPLC: MLX90614 (GY-906) infrared non-contact thermometer</a>	2026/05/08 00:03	communication, i2c, temperature, mlx90614, gy-906, modul, infrared, non-contact thermometer, dsp, pwm, smbus, hailege
• <a href="#">lamaPLC: PCF857x I/O Expander chip/modul with I<sup>2</sup>C communication</a>	2026/05/15 01:03	communication, i2c, pcf857x, pcf8574, pcf8574a, pcf8575, i o expander, i o extension, nxp, texas instruments

• LamaPLC: Pixart PAJ7620U2 Gesture recognition sensors/module with I <sup>2</sup> C communication	2026/04/23 21:52	paj7620u2, gy-paj7620, pixart, gesture recognition, i2c, communication, sensor, arduino, code
• lamaPLC: RP2040_ETH_Modul: I <sup>2</sup> C scanner	2026/05/12 16:20	code, micropython, 2026, rp2040 eth, i2c, comunication
• lamaPLC: RP2040_ETH_Modul: MLX90614 simple	2026/05/12 17:06	code, micropython, 2026, rp2040 eth, i2c, communication, mlx90614
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data	2026/05/12 21:06	code, micropython, 2026, rp2040 eth, bme680, i2c, sensor, communication
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data and store in Modbus input registers	2026/05/12 18:58	code, micropython, 2026, rp2040 eth, bme680, i2c, sensor, communication
• LamaPLC: SC16IS750 / SC16IS752: One or two serial (UART) ports from microcontroller via I <sup>2</sup> C or SPI communication	2026/04/23 21:52	cjmcu-750, cjmcu-752, cjmcu, nxp, sc16is750, sc16is752, uart, serial, i2c, spi, modul, converter, arduino, code
• LamaPLC: SGP Sensirion TVOC/VOC sensors with I <sup>2</sup> C communication	2026/04/15 19:41	sgp30, sgp40, sgp41, sensirion, gas-sensor, i2c, communication, sensor, arduino, code, eco2, voc, tvoc, indoor air quality, iaq, nox, hydrogen
• LamaPLC: SHT Sensirion Temperature/humidity sensor with I <sup>2</sup> C communication	2026/04/23 21:52	sht20, sht21, sht25, sht30, sht31, sht35, sht40, gy21, temperature, humidity, i2c, communication, sensor, arduino, code
• lamaPLC: Signal level converters	2026/02/14 23:47	pca9306, i2c, voltage, level, converter
• lamaPLC: st756x display drivers	2026/05/20 16:17	display, driver, i2c, spi, lcd, cog, oled, st7565, st7567, gm12864, gm12864-59n, gm12864-03a, gm12864-01a, gme12864-41
• lamaPLC: TCA9548A (HW617); Low-Voltage 8-Channel I <sup>2</sup> C Switch Module	2026/02/14 23:51	tca9548a, hw617, i2c, switch, communication, expansion board, arduino
• lamaPLC: TM1637 7-segment display	2026/02/14 18:26	i2c, 7-segment display, display, tm1637, arduino
• LamaPLC: TOFnnnC STMicroelectronics Time-of-Flight (ToF) sensors with I <sup>2</sup> C communication	2026/04/23 21:52	tof050c, vl6180, tof200c, vl5310x, tof400c, vl5311x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code
• LamaPLC: VL53Lnn STMicroelectronics time-of-flight (ToF) laser-ranging sensors with I <sup>2</sup> C communication	2026/04/23 21:52	vl5310x, vl5311x, vl5310 1xv2, gy-530, time-of-flight, tof, laser-ranging, i2c, communication, sensor, arduino, code
• LamaPLC: VL6180X STMicroelectronics Time-of-Flight (ToF) sensor with I <sup>2</sup> C communication	2026/04/23 21:52	vl6180x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code
• lamaPLC: XGZP68xx: Silicon Pressure Sensors/Module	2026/05/15 15:17	communication, i2c, sensor, modul, pressure, cfsensor, xgzp68xx, xgzp6810d, xgzp6857d, xgzp6859d, xgzp6887d, xgzp6897d, xgzp6899a, piezoresistive, capacitive

- [Magnetic angle sensors](#) 2026/04/23 21:52 [magnetic angle sensor](#), [magnetic flux sensor](#), [spi](#), [i2c](#), [pwm](#), [communication modul](#), [as5047p](#), [as5600](#), [mt6701](#), [mt6816](#), [mt6835](#), [tle5012b](#), [amr](#), [gmr](#), [tmr](#), [anisotropic magnetoresistive](#)
- [SSH1106/SSD1306 OLED Display with I<sup>2</sup>C communication](#) 2026/02/14 18:27 [i2c](#), [oled](#), [display](#), [ssd1306](#), [sh1106](#), [ssh1106](#), [arduino](#), [cmos](#)

[CJMCU-219](#), [INA-219](#), [INA219](#), [breakout board](#), [i2c](#), [communication](#), [sensor](#), [voltage](#), [current](#), [arduino](#), [code](#), [CJMCU](#)

This page has been accessed for: Today: 1, Until now: 174

From: <https://lamaplc.de/> - **lamaPLC**

Permanent link: <https://lamaplc.de/doku.php?id=sensor:ina219>

Last update: **2026/04/21 20:47**

